

## VoglToptec



**Attractive in Appearance,**  
*Highly Active in Acoustics*

The acoustic plaster system with  
guaranteed results

## Perfect acoustic plaster ceilings are a question of technique


Besides the acoustically highly effective perforated panels, acoustic plasters can also be used to significantly improve room acoustics through wall and ceiling surfaces. Each of these techniques can in itself offer a highly effective acoustic solution. Combined, they are an unbeatable team in terms of aesthetics and sound absorption. So far, however, working with conventional plaster base panels was more like using smooth gypsum plasterboards than a modern installation technique. VoglToptec works quite differently and, above all, without requiring any filler.



### Economical and ultra-efficient:

A milestone in acoustic plaster ceilings:

- Elimination of panel jointing results in considerable increase in perforated area, thus enhancing acoustic efficiency
- Quicker and more economical installation due to precise edge-to-edge mounting technique
- Sound absorption coefficient of up to  $\alpha_w = 0.95$  (absorption class A)
- All from one source: The complete system, perfectly harmonised and tested
- Delivery includes Vogl screw kit

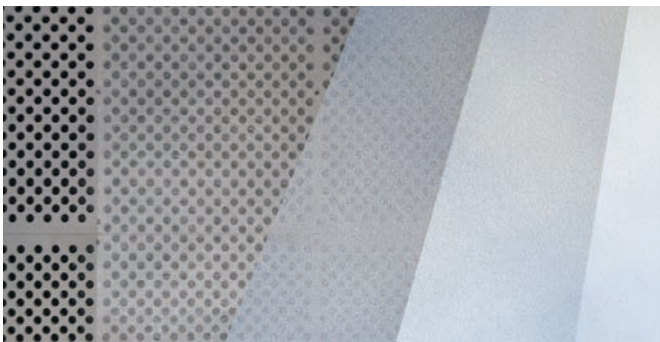


Layer build-up of the finishing coats

The acoustic plaster is machine-applied onto the plaster base fleece in three time-lagged operations until an open-pored plaster layer of approx. 3 mm thickness is achieved.



VoglToptec Akustik Nano SF


Machine-applied acoustic plaster with a very fine surface texture, grain size 0.5 to 0.8 mm.



VoglToptec Akustik Color

Coloured machine-applied acoustic plaster, pigmented throughout, according to RAL or other colour charts.



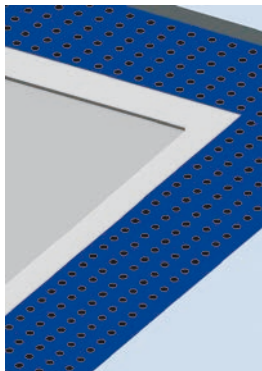

VoglToptec acoustic plaster system panels are perforated ceiling panels with high acoustic performance (exception: Type Reflexio which creates reflecting areas) for on-site lamination of the fleece plaster base (glass fibre fleece) and subsequent final coating with VoglToptec acoustic plaster.

Acoustic fleece or foil lamination backing, four-side sharp-edged with undercut for installation using the quickest and most secure "edge-to-edge" laying principle.

Delivery including VoglToptec screw kit (incl. perforated panel screws SN 3.5 x 30).

**Based on standard:** EN 14190 "Gypsum plasterboard products from reprocessing"

**Fire rating:** A2-s1, d0 or B1-s1, d0 (with foil) according to EN 13501-1

**Long edge:** SK (sharp-edged)

**Short edge:** SK (sharp-edged)



Illustration	Item number	Description	Details	m <sup>2</sup> /pallet Pcs./pallet
	LP-00853	Acoustic plaster system panel Reflexio Acoustic fleece, black	1,206 x 2,006 x 12.5 mm Perforated area: 0 % Mass: 10.0 kg/m <sup>2</sup>	60.5 m <sup>2</sup> 25 pieces
	LP-00856	Acoustic plaster system panel 8/18R Acoustic fleece, black	1,194 x 2,004 x 12.5 mm Perforated area: 15.4 % Mass: 8.5 kg/m <sup>2</sup>	59.8 m <sup>2</sup> 25 pieces
	LP-00860	Acoustic plaster system panel 12/25Q Acoustic fleece, black	1,206 x 2,006 x 12.5 mm Perforated area: 22.9 % Mass: 7.7 kg/m <sup>2</sup>	60.5 m <sup>2</sup> 25 pieces
	LP-00865	Ultracoustic panel DLV 12/25R Acoustic fleece, black	1,232.5 x 1,950 x 12.5 mm Perforated area: 33.9 % Mass: 6.5 kg/m <sup>2</sup>	60.0 m <sup>2</sup> 25 pieces
	LP-00873	Acoustic plaster system panel 12/25Q Acoustic fleece, black and foil	1,206 x 2,006 x 12.5 Perforated area: 22.9 % Mass: 7.7 kg/m <sup>2</sup>	60.5 m <sup>2</sup> 25 pieces

#### VoglToptec Ultrakustik Panel

The panel with integrated mounting instruction, thanks to surrounding and transverse screw-fixing and stop bars. Perfect smoothness and excellent stability despite the very high share of perforation of up to 33.9 %.










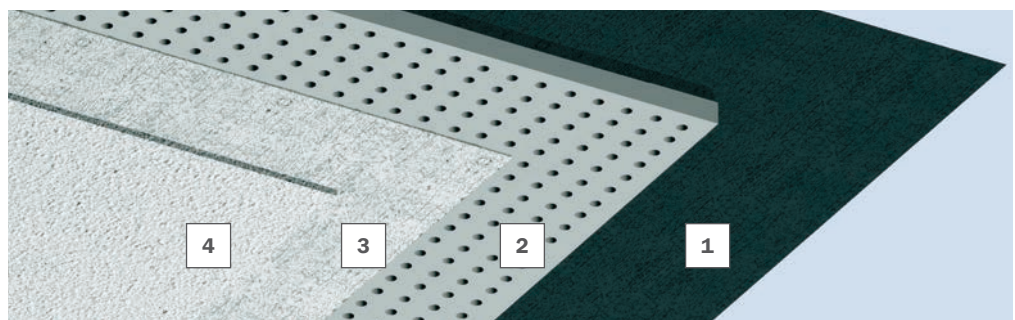
Illustration	Item number	Description	Contents	PU PU/pallet
	101227	<b>Vogl Supergrund primer LF 20I</b> Universal primer, absorbency regulating, free from solvents and softening agents, low-emission, free from active fogging substances	1 canister = 20 litres	1 PU = 1 canister 24 canisters / pallet
	101233	<b>VoglToptec plaster base fleece</b> Special glass fibre fleece as plaster base for coating with acoustic plaster, non-combustible A2, crack-bridging properties, damp-proof, dimensionally stable, white colour	Roll width = 1,145 mm Roll length = 100 m	1 PU = 1 roll 15 rolls / pallet
	101235	<b>VoglToptec plaster base fleece, small</b> Special glass fibre fleece as plaster base for coating with acoustic plaster, non-combustible A2, crack-bridging, damp-proof, dimensionally stable, white colour. The plaster base fleece is especially suited for applying wallpaper in the perimeter / wall connection area as well as for custom solutions.	Roll width = 500 mm Roll length = 100 m	1 PU = 1 roll
	101232	<b>VoglToptec Special Adhesive</b> Ready-to-use, dispersion adhesive, tested for harmful substances, for bonding the plaster base fleece to perforated ceiling panels, free from solvents and softening agents, low-emission, free from active fogging substances, ready-mixed product	1 bucket = 16 kg Consumption: approx. 0.3 kg/m <sup>2</sup>	1 PU = 1 bucket 24 buckets / pallet
	PU-00001	<b>VoglToptec Akustik Nano SF</b> Decorative, open-pored, machine-applied acoustic plaster, very fine texture, grain size 0.5 - 0.8 mm, dull matt, high degree of whiteness, ready-mixed product	1 bucket = 18 kg Consumption: 2.7 - 3.0 kg/m <sup>2</sup>	1 PU = 1 bucket 24 buckets / pallet
	PU-00003	<b>VoglToptec Akustik Color Nano SF</b> Decorative, open-pored machine-applied acoustic plaster, very fine texture, grain size 0.5 - 0.8 mm, ready-mixed product; please specify colour of choice (RAL etc.) when ordering	1 bucket = 18 kg Consumption: 3.0 - 3.5 kg/m <sup>2</sup> *	1 PU = 1 bucket 24 buckets / pallet

\*Note: Dark or special colour shades may lead to increased consumption. Actual quantities depend on the respective project.

#### System-inherent reliability!

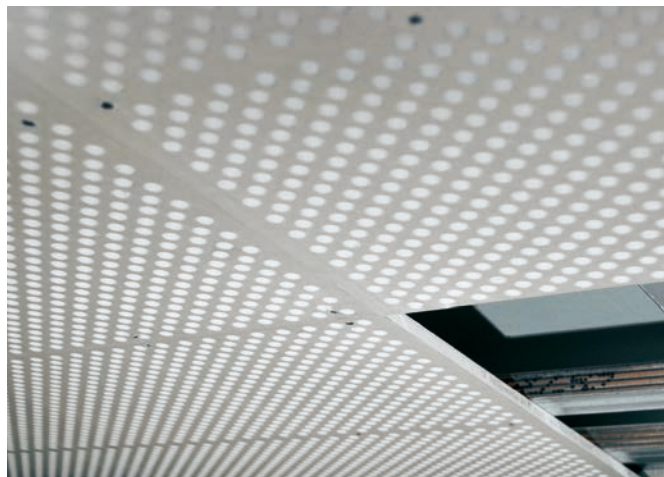The perfectly harmonised components are system tested and guarantee unparalleled reliability in terms of installation and performance of our acoustic plaster ceilings.

- 1 Acoustic fleece (and foil, if any) factory-supplied
- 2 VoglToptec Acoustic Plaster System panels
- 3 Plaster base fleece installed on-site
- 4 Acoustic Plaster applied on-site



The primary profiles are rigidly hung from the structural soffit with suspended brackets using fixing materials approved by the relevant building authorities.

Centre distance and number of suspended brackets, as well as fixation, are subject to site requirements and EN 13964/DIN 18181.

The CD 60/27 secondary profiles are attached to the CD 60/27 primary profiles using cross connectors.

CD 60/27 are extended using straight connectors. For primary grid profiles, always ensure that the joint is close to a suspended bracket (max. 100 mm). Joints should generally be staggered.


Plasterboards should be installed in accordance with EN 13964/DIN 18181 and manufacturer's guidelines.

Additional items such as lighting, ventilation, sprinkler systems etc. must be individually suspended.



Any changes in framework owing to integrated ceiling components must be considered.

VoglToptec framework								
Technical data	Unit	Perforated panel ceiling						
Panel thickness	mm	12.5						
Distributed load	kN/m <sup>2</sup>	≤ 0.15					≤ 0.30	
Centre distance of suspended bracket A	mm	1,150	1,050	1,000	950	900	900	750
Centre distance of primary profiles X	mm	600	800	900	1,000	1,100	600	1,000
Centre distance of secondary profiles Y	mm	see table below						

Item	Unit	Centre distance of secondary profiles Y
VoglToptec Acoustic Plaster System panels 8/18R, 12/25Q, Reflexio (smooth)	mm	334
VoglToptec Ultrakustik Panel 12/25R DLV	mm	325

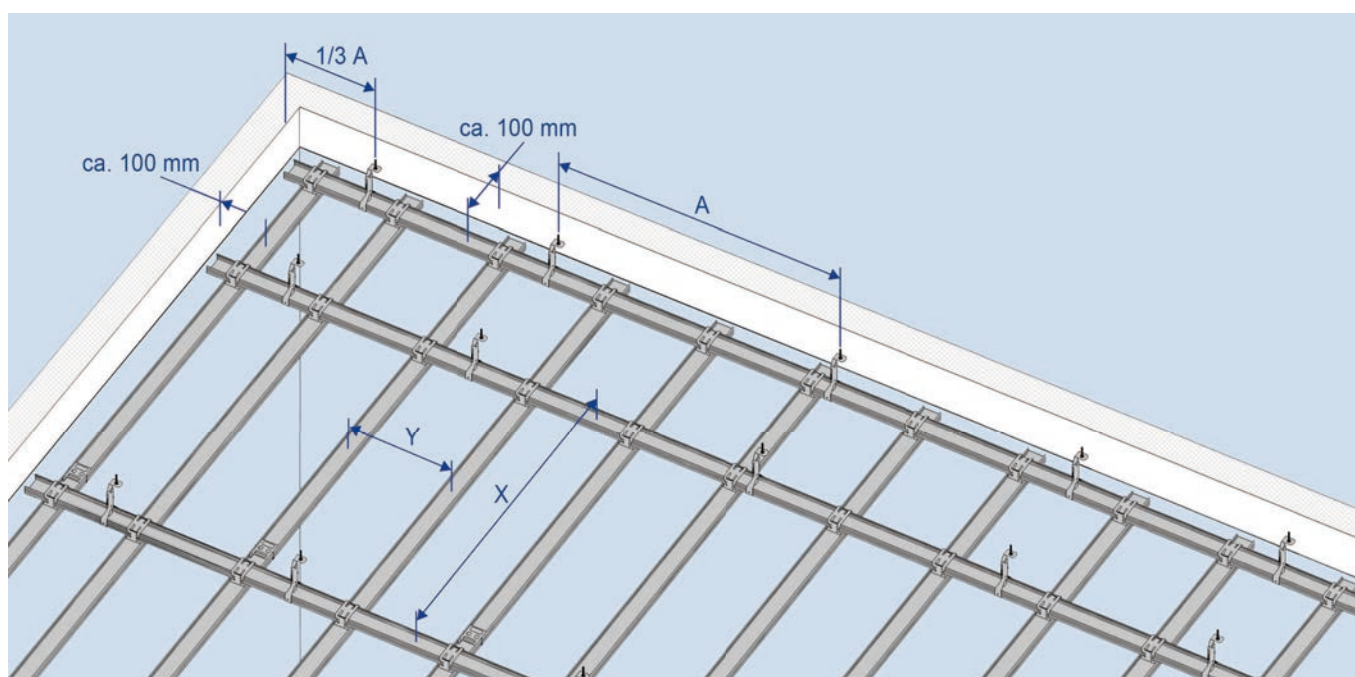




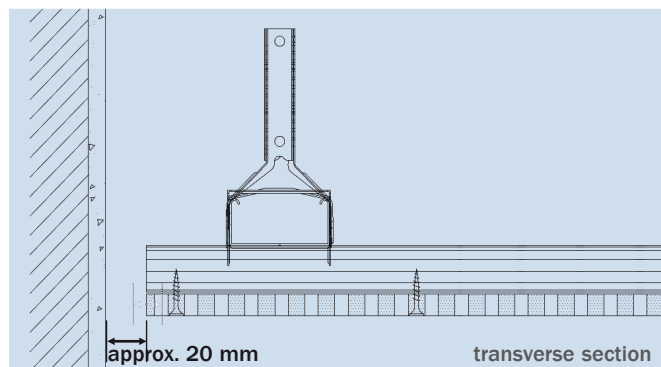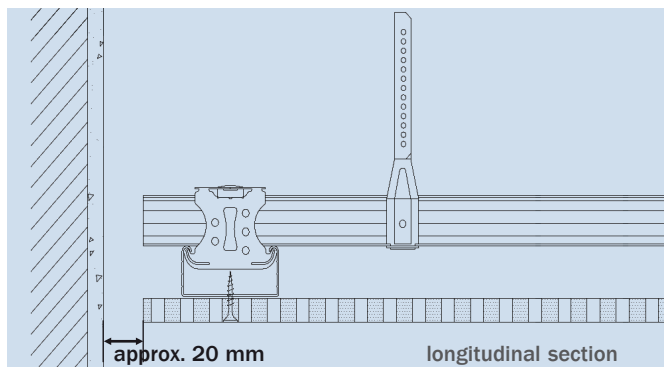

#### Wall connection:

To avoid different pressure ratios / temperatures between the ceiling void and usable space, we recommend ventilating the ceiling. To do this, we advise you to fit the wall connection with an open shadow gap (approx. 20 mm) in the VoglToptec system.

Please contact us if you require additional standard details concerning the VoglToptec system.

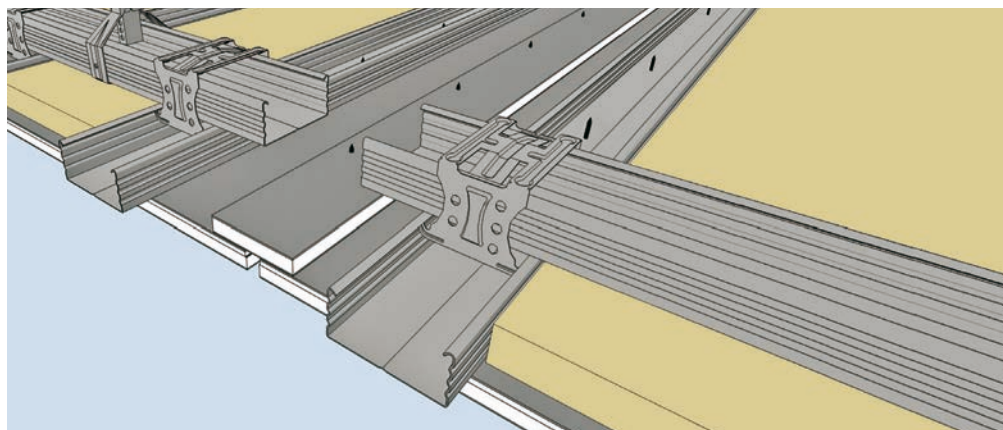

#### Expansion joints:

To prevent cracking in the ceiling surface, expansion joints have to be provided every 10 linear metres/100 m<sup>2</sup> of the ceiling area.

The framework must be completely severed (see illustration) and the panel strips above the joint must be screwed down on one side only.

Material required per m<sup>2</sup> based on a ceiling of 100 m<sup>2</sup> (10 m x 10 m, not considering loss or waste, approximate values):


Metal framework, suspended bracket centre distance 1,000 mm, primary profile spacing 900 mm, secondary profile spacing 333 mm			
Item number	Item description	Unit	Quantity
<b>Fixation</b>			
Standard	Safety nail, DN 6 x 35	piece	1.3
<b>Suspended brackets</b>			
See product range	Direct suspended bracket 50/120/200 and	piece	1.3
100994	Tapping screw LN 3.5 x 9.5	piece	2.6
<b>or</b>			
See product range	Vernier hanger / vernier bottom part and	piece	1.3
100981	Vernier security pin and	piece	1.3
See product range	Vernier top part, 200 - 2,000 mm, custom lengths on request	piece	1.3
<b>Profiles and connectors</b>			
See product range	CD profile 60/27/0.6 rK, l=XXX mm	m	4.1
101595	Connector, lengthwise, CD 60/27	piece	0.8
101567	Cross connector, CD 60/27	piece	3.3
100995	Perforated panel screw SN 3.5 x 30	piece	22

## VoglToptec Thermotec

### The perfect solution for your acoustic plaster climate control ceiling.

You want your acoustic plaster ceiling to be both visually attractive and provide efficient climate control performance? Then our VoglToptec Thermotec system is just right for your project!

With the perfect combination of 10 mm VoglThermotec panels and the VoglToptec acoustic plaster system, you will get optimum cooling capacity combined with sound absorption and an attractive finished surface. Of course, with integrated result reliability – as all the system components come from the ceiling specialist Vogl Deckensysteme.

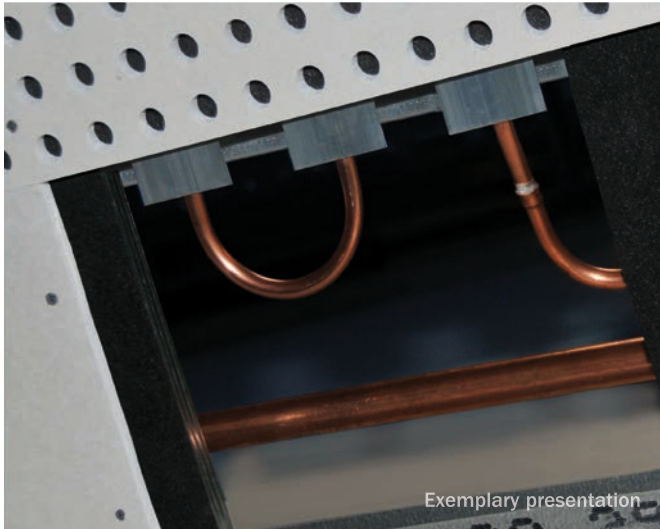


## VoglToptec backed with foil

### The right choice if you want your ceiling to be impermeable to airflow.




As you surely know, a ventilation system is often required to be installed within the ceiling void to meet air exchange requirements. In many cases, this ventilation is to take place only through the ceiling joints at the perimeters, and the rest of the ceiling surface must be airtight. Now there is a safe and easy-to-use solution for this application in the VoglToptec system. With the foil laminated on the back of the panels, the acoustic plaster ceiling remains impermeable to airflow – but without compromising its acoustic performance. The ideal product if your finished ceiling ever comes “under pressure”.



Check ceiling framework for rigidity and evenness (using a straightedge).



Then check ceiling grid CD sections for centre distances and adjust, if necessary. Always mount straight connectors in a staggered manner (see figure). Measure centre distances accurately!



As viewed from entrance area, choose panel arrangement with short edges parallel to windows (main direction of light).



Locate centre of room to position first ceiling panel, also taking into account resulting ceiling perimeter to wall connections.



Get panel to correct position on framework using a panel lifter if working alone, or else another worker's help.



#### We recommend the following accessories for installation:




Perforated panel screws, including screw bit

#### Correct handling of ceiling panels:




- Always take load carrying capacity of building into account when storing ceiling panels
- Do not store ceiling panels upright, but always flat on panel pallets
- Always carry ceiling panels with short edges upright
- Protect ceiling panels from moisture; relative humidity should be 40 - 80 %
- Avoid major temperature fluctuations
- Do not expose stored ceiling panels to direct sunlight

Perforation pattern	Centre distance
Acoustic plaster system panel 8/18R, 12/25Q, Reflexio	334 mm
Ultracoustic panel 12/25R DLV	325 mm




Screws must be put into panel at right angles and countersunk head screwed down to 0.5 mm below visible surface of ceiling panel.



Screws should be spaced maximum 170 mm from fixing point to fixing point. Distance between screw and panel edge not to exceed 26 mm. Avoid damaging acoustic design panels by countersunk heads.



First, screw ceiling panel to framework in centre of panel, then lower panel lifter and fix a screw in centre of each short edge before finally screwing down long edges.





Take note of panel labelling (stamp) and mount in direction of reading (all stamps should point in same direction).






Use CD profile or straightedge as end stop. Position next panel by sliding it to first alongside CD profile / straightedge and fix in place.




#### General site conditions / Manufacturer's instructions:

- Take movement joints of building structure into account
- Plan to include expansion joints after approx. every 10 m or approx. 100 m<sup>2</sup>
- Cardboard layer must not be penetrated by screws, but merely displaced downwards
- Working temperature should be at least +10 °C and job site temperature not below +5 °C
- Installed ceiling surfaces must not be connected to perimeter walls
- Place any damping (mineral wool layer) directly onto the ceiling panels
- Carry out any additional work on ceiling (access openings, lighting recesses, etc.) immediately after installing ceiling panels




Fix screws in panel joint area using alternating pairs across panels ("zig-zag" principle), starting left or right next to screw which has already been fixed. This will create flush joint areas.






Install ceiling panels first lengthways, then crossways, resulting in cross arrangement on ceiling. Cover remaining areas in same manner, working from centre of room outwards.





Lay remaining ceiling panels edge-to-edge, always checking that joints are level and using "cross joint" system only.






After all panels have been installed, recheck that all joints are level and adjust, if necessary, using a screwdriver. Then check with a straightedge.




Place any damping layer directly onto back of ceiling panels. We recommend fitting an open shadow gap at the wall connection.



Provide for expansion joint of 5 to 10 mm every 10 linear metres / 100 m<sup>2</sup>. Additional board strip above joint must be screwed down on one side only.



Check panel joint areas and screw heads and adjust any height discrepancies using a screwdriver.



Prime ceiling surface with Vogl Supergrund LF. Subbase must be dry and free from dirt and separating substances. Apply primer in undiluted state using lambskin roller.


Drying time: 12 h




#### General site conditions / Manufacturer's instructions:

- Store primer, adhesive and acoustic plaster in \*\* frost-free environment \*\*
- Reclose containers for extended work breaks
- Stir all materials well before use
- Working temperature should be at least +18 °C and job site temperature not below +10 °C
- Relative humidity: 40 - 80 %
- Self-levelling, cement or asphalt screeds must be fully dried – make sure there is no residual moisture
- Avoid shock heating or cooling of rooms during installation or drying times to prevent cracking
- Store away from sun and heat

Apply VoglToptec Special Adhesive generously and evenly using lambskin roller and immediately install plaster base fleece into wet adhesive bed pushing it in with a wallpaper smoother. **Do not** spray-apply adhesive.




While applying fleece, make sure that special adhesive has not started to dry as this can cause bubbles. Place further lengths of plaster base fleece overlapping (5 - 10 cm) and separate using a double cut.



Check surface and joints. There must not be any adhesive on visible face of fleece (light marks).

Drying time: Min. 12 h



Stir VoglToptec Nano SF acoustic plaster slowly before use (2 - 3 minutes).

VoglToptec Nano SF = ready-mix



#### Final coating of acoustic plaster–Manufacturer's instructions:


- Machine requirements: Plaster spray system with worm conveyor (e.g. Strobot 204S) or delivery pump (e.g. InoBeam M8) and high-performance compressor
- Spray distance (nozzle to ceiling) approx. 700 - 900 mm
- Air flow 1.5 - 2.0 bar
- Nozzle size 4 - 6 mm (depending on desired texture)
- Application quantities:
 

1st spray application approx.	700 g/m <sup>2</sup>
2nd spray application approx.	900 g/m <sup>2</sup>
3rd spray application approx.	1,100 g/m <sup>2</sup>
Total approx.	2,700 g/m <sup>2</sup>

Apply first layer by spraying-on acoustic plaster in circular motion.


Attention – avoid development of paint mist; holes must remain visible.

Drying time: 5 h



After drying period, apply 2nd coat to ceiling, also in circular motion; holes still slightly visible.



Drying time: 12 h





After drying period, apply 3rd coat to ceiling, also in circular motion; holes no longer visible.

Drying time: 12 h



Application quantity  
 approx. 1,100 g/m<sup>2</sup>



#### Renovation / renewal of acoustic plaster coating

To remove any soiling, ceiling can be given another machine-applied coating. Before application, sweep ceiling with a fine hair broom.



Attention: Applying paint will affect acoustic properties of ceiling!



With circular motions, apply another coat to ceiling surface. Depending on degree of soiling, application quantity of acoustic plaster can vary.



Application quantity  
 approx. 900 - 1,100 g/m<sup>2</sup>

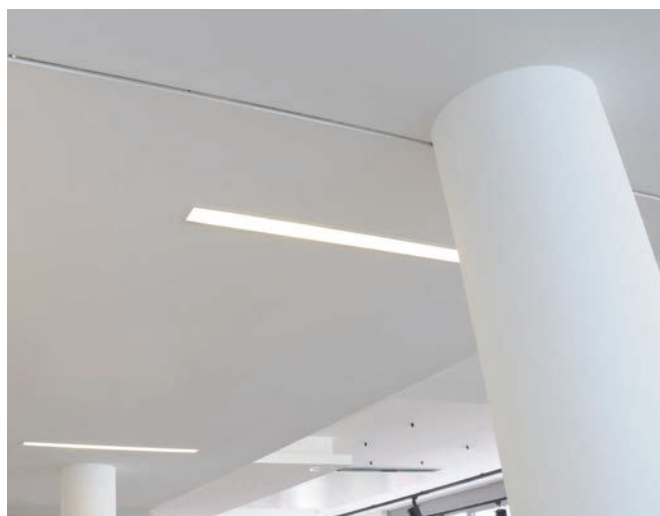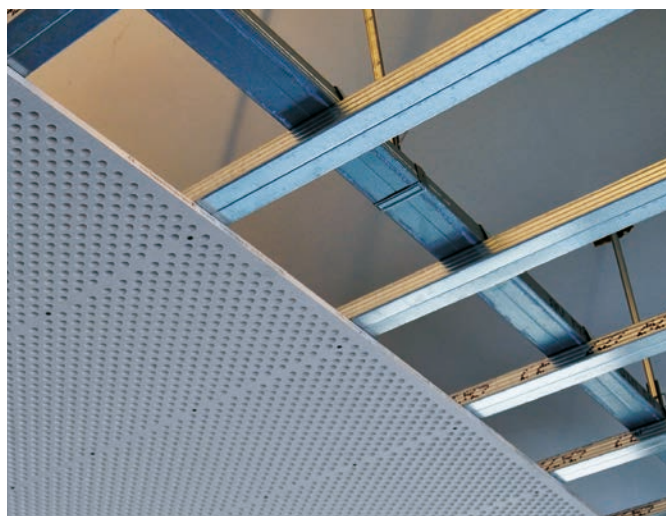

#### Quantities required for final coating per m<sup>2</sup> (not considering loss or waste)

Item number	Item description	Unit	Quantity
101227	Vogl primer Supergrund LF	l	approx. 0.15
101232	VoglToptec Special Adhesive	kg	approx. 0.30
101233	VoglToptec plaster base fleece	m <sup>2</sup>	approx. 1.00
PU-00001	VoglToptec Akustik Nano SF	kg	approx. 2.70 - 3.00
PU-00003	VoglToptec Akustik Color Nano SF	kg	approx. 3.00 - 3.50

Errors, printing faults and technical changes reserved. Consumption, quantity and design details are based on empirical values. The details contained in this text correspond to the current state of technology. Any relevant valid building technology regulations, standards and guidelines must be observed in addition to our processing instructions. All rights reserved. Reprints as well as electronic reproduction, even extracts, require the express approval of Vogl Deckensysteme GmbH, Industriestrasse 10, DE-91448 Emskirchen, Germany.

#### PICTURE CREDITS

Page 1 top, photo: Daniel Wieser · Page 1 bottom left, photo: Vogl Deckensysteme GmbH · Page 2 top left, photo: Vogl Deckensysteme GmbH · Page 2 top right, photo: Thilo Jaeckel · Page 2 centre right, photo: HG Esch · Page 2 bottom, photos: Vogl Deckensysteme GmbH · Page 3 photo: Vogl Deckensysteme GmbH · Page 7 top left, photo: Vogl Deckensysteme GmbH · Page 7 top right, photo: Thilo Jaeckel · Page 7 bottom left, photo: Vogl Deckensysteme GmbH · Page 7 bottom right, photo: Thilo Jaeckel · Page 11 centre left, photo: Vogl Deckensysteme GmbH · Page 11 centre right, photo: Thilo Jaeckel

Status 11/2018



#### Acoustic plaster ceiling – VoglToptec system

Acoustic plaster ceiling as suspended ceiling structure, one side clad with VoglToptec acoustic plaster system panels, backed with acoustic fleece, mounted to a rigid ceiling framework of galvanised metal profiles, hung with flush and horizontally aligned suspended brackets and installed using fixing materials approved by the building authorities, with or without damping layer depending on building physics requirements. Installation in accordance with manufacturer's instructions, including all connection and jointing work as well as connection and fixing materials.

Ceiling system to accommodate an on-site application of machine-applied plaster consisting of VoglToptec plaster base fleece and final coating using VoglToptec acoustic plaster in accordance with manufacturer's instructions.

#### System structure

Framework in accordance with DIN 18181:2007-02

#### Profiles:

Pressure-resistant design made from galvanised sheet steel profiles CD 60/27 as primary and secondary profiles in accordance with EN 14195

#### Suspended brackets:

- Suspend with vernier systems (top part, vernier hanger)\*
- Suspend with vernier systems (top / bottom part)\*
- Suspend with direct suspended brackets\*
- Use fixing materials approved by the relevant building authorities.

#### Connection:

For primary-secondary profile connection with cross connectors, use suspended brackets and cross connectors in accordance with EN 13964.

Suspended bracket centre distance: max. 900 mm,  
Primary profile centre distance: max. 1,100 mm,  
Secondary profile centre distance: 325/334 mm\*

#### Covering:

Acoustic plaster system panels are perforated ceiling panels in accordance with EN 14190, backed with acoustic fleece, one layer 12.5 mm, laid edge-to-edge and fixed to the framework using perforated panel screws SN 30, with screw spacing max. 170 mm. Observe manufacturer's installation guidelines.

#### Perforation pattern / perforated area / mass per unit area:

- Reflexio / 0.0 % / 10.0 kg/m<sup>2</sup>\*
- 8/18R / 15.4 % / 8.5 kg/m<sup>2</sup>\*
- 12/25Q / 22.9 % / 7.7 kg/m<sup>2</sup>\*
- Ultracoustic 12/25R DLV / 33.9 % / 6.5 kg/m<sup>2</sup>\*

#### Distributed load:

- less than or equal to 0.15 kN/m<sup>2</sup>\*
- less than or equal to 0.30 kN/m<sup>2</sup>\*

#### Joint finishing:

VoglToptec system in accordance with manufacturer's instructions, "edge-to-edge" installation principle, filler-free. Sand down area of screw heads and panel joints level, paying attention to leave the screw heads unsanded. No filling required. Observe manufacturer's installation guidelines.

#### Subbase:

Suspension height: h = mm  
Installation height: h = mm  
Room height: h = mm  
Insulation thickness: th = mm

Subsequent application: Final coating in VoglToptec system

Complete system: Vogl Deckensysteme, or equivalent

\* Delete as applicable

